


NY = Poliammide PA6.6 UL94V2
T 110°C GWIT775°C
FV = Poliammide PA6.6 + 25% FV UL94V0
T150°C GWT750°C
 Bussole in ottone OT58
 Viti in acciaio zincato
 Lamella in ottone OT67 stagnato

NY = Polyamide PA6.6 UL94V2
T110°C GWIT775°C
FV = Polyamide PA6.6+25%FV UL94V0
T150°C GWT750°C
 Metallic inserts in OT58
 Screws in zinc plated steel
 Tab in tinned OT67 brass



Approvazioni / Approvals

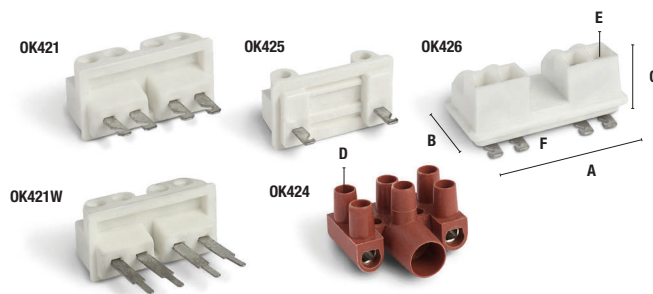


Legenda delle quote
 Legend for dimensions

Descrizione - Description	Art		Art		Art		Art		Art	
Morsetti / Terminal blocks	OK421 NY		OK421W NY		OK424 NY / FV		OK425 NY		OK426 NY	
	2,5mm2 - 24A - 450V		2,5mm2 - 24A - 450V		6mm2 - 41A - 450V		2,5mm2 - 24A - 450V		4mm2 - 32A - 450V	
Numero di poli / Number of poles	3	4	4		3	2		2	3	4
Lamella dritta 0° / Straight 0° tab	48009.32	48014.32	48017.32			48029.32	48025.32	48032.32	48038.32	
Lamella piegata 45° / Heeled 45° tab	48010.32	48015.32				48030.32				
Lamella piegata 90° / Heeled 90° tab	48011.32	48016.32	48021.32			48031.32	48028.32	48033.32	48036.32	
A Lunghezza / Length	30,1 mm		30,1 mm		31,6 mm		26,4 mm		39,2 mm	47,5 mm
B Larghezza / Width	16 mm		16 mm		29 mm		16,7 mm		22,8 mm	
C Altezza / Height	15 mm		15 mm		21 mm		14,8 mm		17,8 mm	
D Vite / Screw	M 3		M 3		M 3,5		M 3		3,5	
E Ø Foro bussola / Bush hole	3,4 mm		3,4 mm		4,4 mm		3,4 mm		3,7 mm	
F Lunghezza lamella / Length of the tab	7,5 mm		18 mm				7,5 mm		7,5 mm	
Imballo / Box	2000 pz. / pcs.		2000 pz. / pcs.		1000 pz. / pcs.		2000 pz. / pcs.		1000 pz. / pcs.	

Poliammide grigia **PA6.8**
 Autoestinguente **UL94V0**
 Temperatura di esercizio di **110°C**
GWIT775°C (EN60695-2-13)
 Bussole in ottone OT67 zincato
 Pin in ottone OT63 stagnato
 Viti in acciaio zincato

Grey polyamide **PA6.8**
 Self-extinguishing **UL94V0**
 Working temperature of **110°C**
GWIT775°C (EN60695-2-13)
 Metallic inserts in zinc plated OT67 brass
 Pin in tinned OT63 brass
 Screws in zinc plated steel

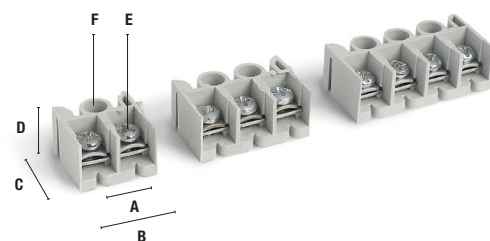

Approvazioni / Approvals



Legenda delle quote
 Legend for dimensions

Descrizione - Description	Art	Cod	Art	Cod	Art	Cod
Morsetti / Terminal blocks	OK15/2	44993.06	OK15/3	44992.06	OK15/4	44991.06
	2,5mm2 - 24A - 450V		2,5mm2 - 24A - 450V		2,5mm2 - 24A - 450V	
Numero di poli / Number of poles	2 agganciabili / interlockable		3 agganciabili / interlockable		4 agganciabili / interlockable	
A Passo / Pitch	10 mm		10 mm		10 mm	
B Lunghezza / Length	22,5 mm		32,5 mm		42,5 mm	
C Larghezza / Width	19,5 mm		19,5 mm		19,5 mm	
D Altezza / Height	13 mm		13 mm		13 mm	
Altezza incluso pin / Height pin included	17,8 mm		17,8 mm		17,8 mm	
E Vite / Screw	M 3,5		M 3,5		M 3,5	
F Ø Foro di fissaggio / Fixing hole	3,5 mm		3,5 mm		3,5 mm	
Confezione / Imballo Packing / Box	50 / 750 pz. / pcs.		50 / 750 pz. / pcs.		50 / 500 pz. / pcs.	